

$(8,804 \pm 0,189)^{-1}$ Fe^{2+} Mg Sr
 2-2,5 2-2,5

- 1. 1982, 254
- 2. 1971, 712
- 3. 1966, 300
- 4. 1971, 320
- 5. 1977, 232
- 6. 1969, 131
- 7. 1970.

3.08.06

666. 1/2

« »
 « »
 « »

TiB₂

TiB₂

The new area use of glasses is present. It is show that the most outlook method of creature strong glasses is drift cover on the surfaces of glass, in particular from TiB₂. The thickness of layer cover from TiB₂ is defined. Established, that this method can be used for building technology. Thus the optical indexes are a

little reduced flow down. However values of operating performances of those glasses are in frameworks admissible on the GOST.


, , -
, , -
.
-
-
.
-
, , -
, , -
» , « -
» , -
, . . . , . « - » ,
, , -
, . -
, , -
[1]. -
, , -
.
, -
.
-
.
, -
, , -
, , -
.
-
.

[2-6].

():

[7,8].

[8].

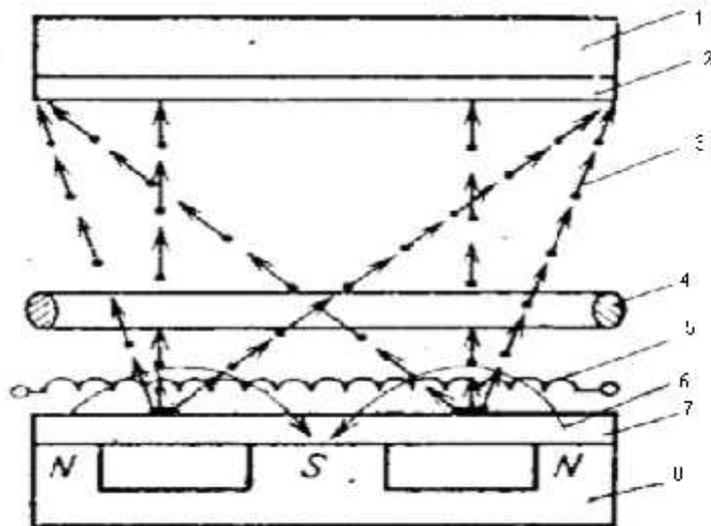

- 1 - ; 2 - ; 3 - ;
4 - ; 5 - ; 6 - ;
7 - ; 8 -

,
 .
 (10⁻² – 1,0)
 10⁶ / ²,
 [8].

2 10³ / ²,
 0,03 – 0,1
 300 – 800
 1

nano indenter II MTS Systems

10 , 30 320
 [9].

50

, 10 –
 – 4 . 5 ,

– 2 – 46.

TiB₂ 10 50
 2 – 4 .

30 – 80 %, -

20 50 . 20) (

,
 ,
 .
 ,
 .
 10 – 50
 4 – 5 ,
 30 – 80 %
 2 – 4 .
 -
 .
 : 1. //
 , 2004. – 4 – . 80. 2. « » // , 1999. – 3 – . 85.
 3. - , , -
 // , 2004. – 3 – . 94. 4. -
 : / . . . ; . – . . . - . -
 : , 1999. – 274 . 5. . . , . – :
 - , 2003. – 480 . 6. . . -
 . – : , 1997. – 188 . 7. « »: -
 // , 2004. – 4 – . 77. 8. . . , . . . -
 // . 2004, . 1.15, , . 18-23.
 9. . . , . . . , . . . //
 . 2005, 5, . 38-47.

30.03.06.