

666.3-184.4

. . . , . . . ,
. . . , . . . , . . . ,

This article shows the research results of pressing initial distortion, air shrinking and ceramics properties depending on humidity and pressing pressure.

.
, , , -
. ,
, .
, , -
. , -
, .
, , -
, , , -
, , ,
, , [1]. -
, , -
, , -
, , -
, , , -
, , , -

6 – 7 %.

-

.

-

:

/ -

-

-

-

.

.

« -II»

,

.

-

-

5

,

15, 20, 25

,

5 – 20 %.

-

,

(

-

),

20

-

-

-

900, 950,

1000 ° .

—

.

,

,

-

.

,

-

,

.

-

,


,

-

(. 1).

$\lambda = 0,2, (. 1).$

1,8 %

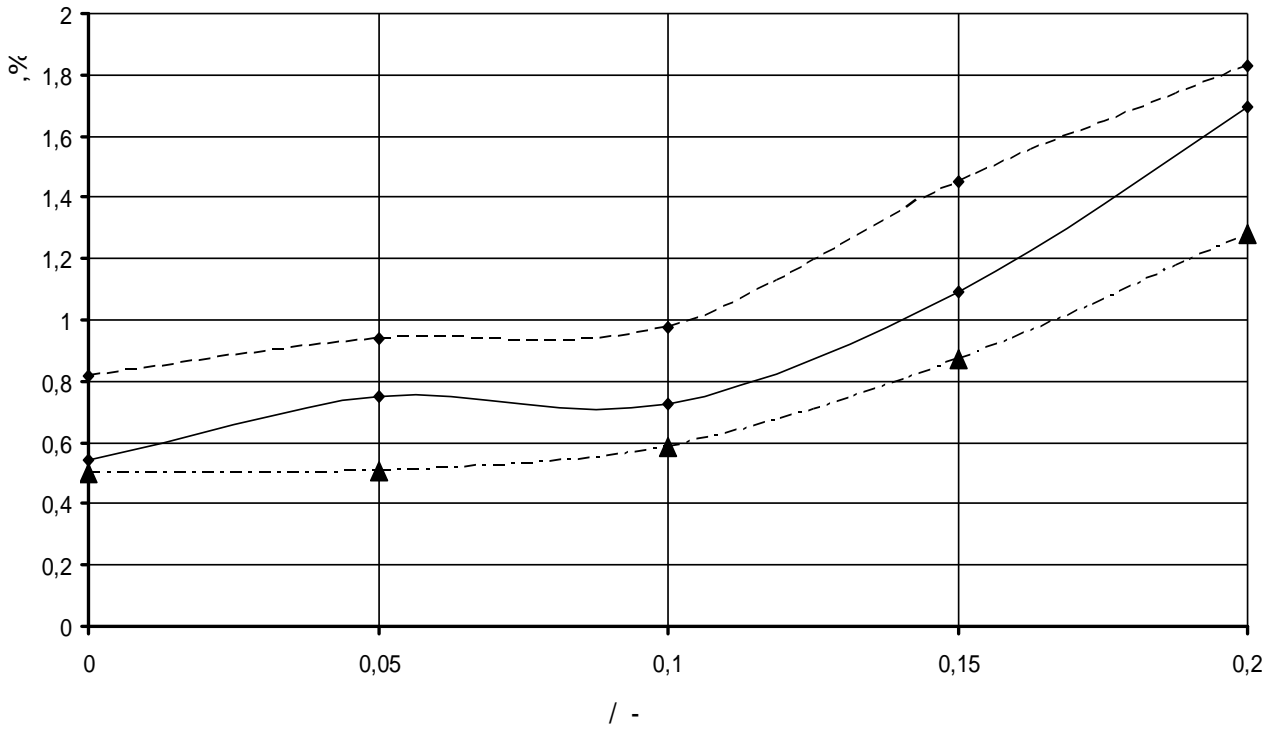


--▲-- 15 ; —◆— 20 ; --◆-- 25 .

. 1. / -

4,5...8 %,


15 , - 8,1 % , . 2.

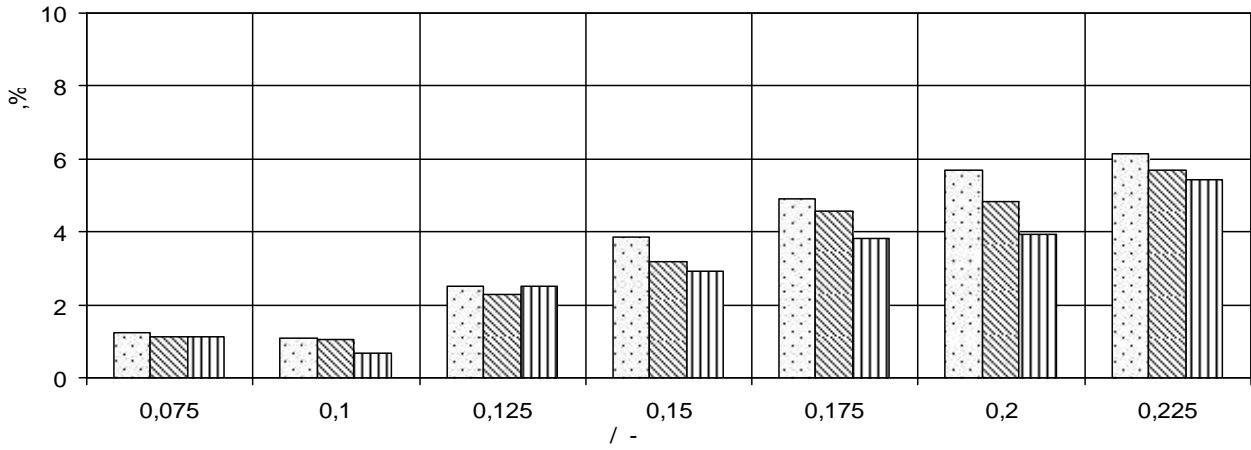

□ ; ▨ ; ▤

. 2. / -

15

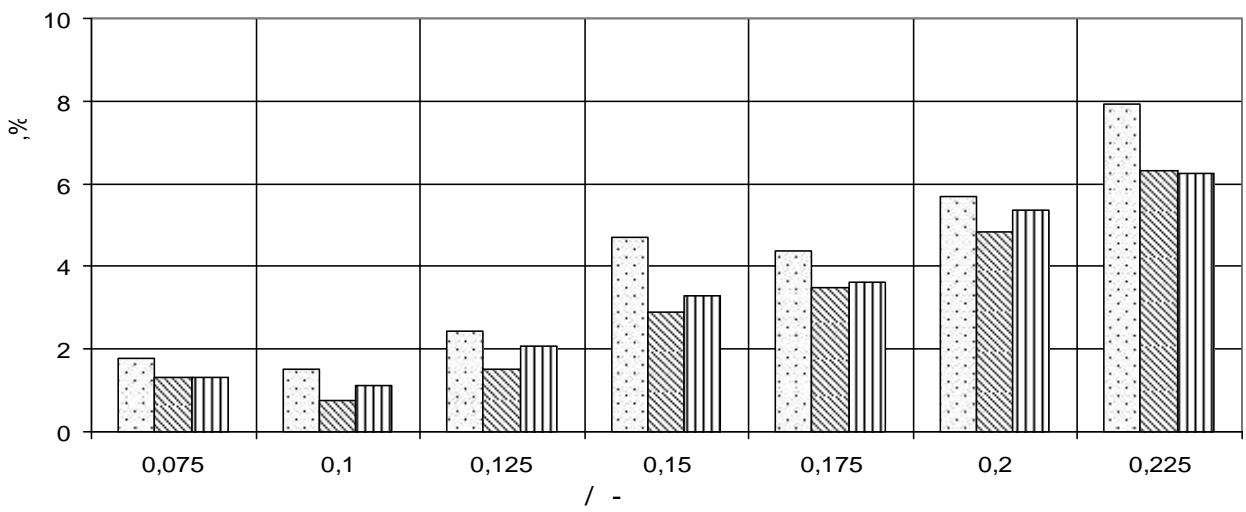


□ ; ▨ ; ▤

. 3. / -

20

6

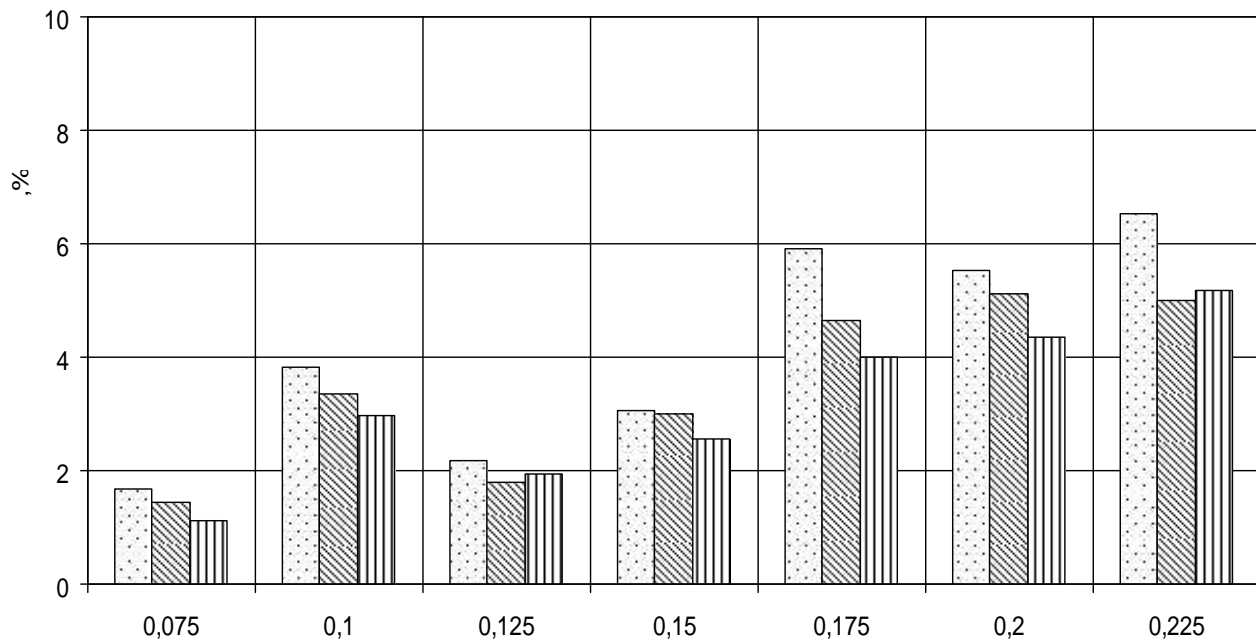

□

;

▣

;

▣

.

. 4.

/ -

25

,

« - II »

/ -

0,12 - 0,15;

20

950 ° .

- 63

,

- 12 %.

: 1.

., 1983. 176 . 2.

1975. 326 .

21.09.07