


[1].

$$\frac{dP}{dH} = \frac{2 \cdot f_0 \cdot v_{LG}^2 \cdot \dots LG}{d}, \quad (1)$$

v_{LG} — ; d — ; f_0 — ;

(. 1)

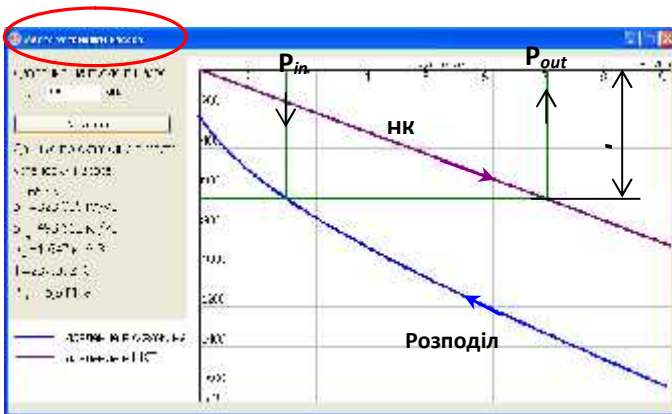

. 1 —

1. — 1980. — 375 .

2. A.R. Hasana, C.S. Kabirb, M. Sayarpourc. Simplified two-phase flow modeling in wellbores// Journal of Petroleum Science and Engineering. –Volume 72, Issues 1–2, May 2010, Pages 42–49.

3. // « » 2005. 2. URL: http://ogbus.ru/authors/Bikbulatov/Bikbulatov_1.pdf.